


ANDOVER GROUND

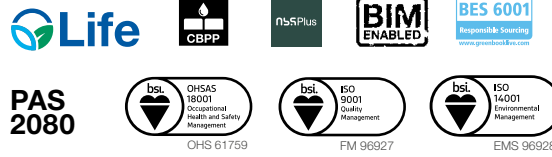

Combines tradition with innovation by incorporating granite aggregates with other selected aggregates to give exceptional durability at an affordable price.

FEATURES

- ▶ Incorporates uniquely formulated granite aggregates to maximise performance, durability and aesthetics
- ▶ Premium ground paving
- ▶ Range of colours can be used to complement and contrast one another
- ▶ Incorporates up to 63% recycled and reclaimed aggregates

APPLICATIONS

Andover ground flag paving is suitable for high volume pedestrian areas, town centres, shopping precincts and footways as well as occasional car or mechanical sweeper overrun, footways with cars and HGV vehicle or service areas. For correct choice of flag size to suit your application, refer to BS7533 Part 8. Refer to technical department for advice on applications: tel: 01335 372222.

MANUFACTURING STANDARD

Andover ground flag paving is manufactured using a wet pressed process and is manufactured in accordance with and complies with all relevant sections of BS EN 1339: Precast Concrete Flags – requirements and test methods. Aggregate Industries fully operates an accredited Quality Assurance scheme, certified to BS EN 9001:2008 which is independently and regularly assessed by BSI (British Standards Institution). All Aggregate Industries manufacturing sites are also certified to BS EN 14001 Environmental Management Systems.

PERFORMANCE


Unpolished slip resistance values, when tested in accordance with BS EN 1339 and BS EN 1338, annex I - method for the determination of unpolished slip resistance value, are available on request. The product is classified as having a low potential for slip i.e. a USRV of greater than 40. Polished slip resistance values can be provided on request.

COMPLIMENTARY PRODUCTS

Designed for use with Aggregate Industries Eco Countryside kerb and Countrysetts.



SWATCHES

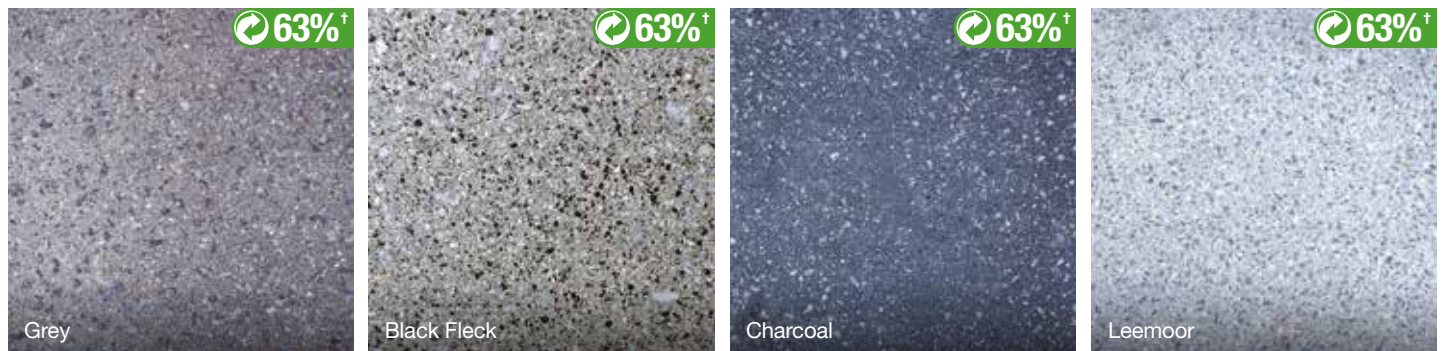

Product Data						
Size (mm)	600x600	600x450	450x450	450x450	400x400	400x400
Thickness (mm)	50	63	70	70	65	65
Weight (kg)	44	38.9	38.7	38.7	25	25
Units/m ²	2.78	3.7	4.94	4.94	6.25	6.25
Units/pack	20	16	30	30	32	32
m ² /Pack	7.2	4.32	6.08	6.08	5.12	5.12
Weight Pack (T)	0.88	0.63	1.16	1.16	0.8	0.8
Shade	Gy, SF, Ch, L	Gy, SF, Ch, L	Gy*, SF*, Ch, L	Gy, SF, Ch, L	Gy, SF, Ch*, L*	Gy, SF, Ch, L
Edge Detail	Square	Chamfered	Chamfered	Square	Chamfered	Square

*Stock Items, all other shades/sizes are Made to Order on a minimum order basis.

Gy - Grey / BF - Black Fleck / Ch - Charcoal / L - Leemoor.

Available as a step insert in all stocked sizes on MTO basis with minimum order of 2 packs.

Made to Order		
Andover Textured & Eco Pave Block Paving (Not Infilta) (minimum 200m ² per colour)	1 Size = 500m ² 2 Sizes = 600m ²	3 Sizes = 700m ² 4+ Sizes = 800m ²
Andover Textured & Eco Pave Infilta Block (minimum 200m ² per colour)	1 Size = 350m ² 2 Sizes = 600m ²	3 Sizes = 700m ² 4+ Sizes = 800m ²
All Specifier Flag Paving – Stonemaster, ECO & Andover (300m ² per colour)	1 Size = 600m ²	2 Sizes = 1,200m ²

†Represents non-primary material within the complete mix design.

SUSTAINABILITY AND LOCAL SOURCING

ENERGY USE AND GREENHOUSE GAS EMISSIONS:

Aggregate Industries is at the forefront of sustainability and has committed to reducing both energy and greenhouse gas intensity 5% year-on-year (18.5% total improvement by 2020).

RECYCLABLE: 100% of the product can be recycled thus reducing the amount of material that is sent to landfill.

MANUFACTURING LOCATION: Produced in the UK, with locally sourced materials under strict environmental and social legislation, for local supply.

RESPONSIBLE SOURCING: Aggregate Industries is the first company in the world to achieve accreditation to the BES 6001 Framework Standard for the Responsible Sourcing of Construction Products.

Aggregate Industries has achieved a 'Very Good' rating for major product groups. The BES 6001 standard assesses:

- ▶ Quality management
- ▶ Environmental management
- ▶ Health and safety management
- ▶ Greenhouse gas emissions
- ▶ Minimising raw material usage
- ▶ Labour practice
- ▶ Biodiversity
- ▶ Community engagement

KEY AGGREGATE AND RECYCLED CONTENT

Andover ground flag paving is manufactured using granite aggregates. It is made in a wet pressed process and ground. Incorporates up to 63% recycled and reclaimed aggregates.

GENERIC GREEN GUIDE RATING*

Concrete paving flags (60mm with a prepared recycled sub-base)

A+ rated.

Concrete paving flags (60mm with a prepared sub-base) -

A rated.

The information contained within this publication was accurate at time of production. However, Aggregate Industries reserves the right to introduce modifications or changes to detail at any time without notice. No charge is levied for this publication or advice therein, and accordingly the company, its employees and authorised agents can accept no liability whatsoever, either indirectly or directly arising from the use of its products.

POLICIES

Aggregate Industries' policies on the environment and community, health and safety and sustainable solutions for different product applications can be viewed on our website www.aggregate.com

DESIGN AND INSTALLATION STANDARD

For pavement design guidance refer to BS 7533 Part 8. For successful installation refer to BS 7533 Part 4. For specific design, installation and maintenance guidance, please contact our technical department on 01335 372222.

MAINTENANCE AND CLEANING

Aggregate Industries can supply on request advice on specific stain removal and general maintenance, suitable cleaning products and referrals to specialist cleaning companies.

COSHH DATA

Full COSHH data is available on request. Please call technical services on 01335 372222.

TECHNICAL SUPPORT

Detailed guidance and assistance with the preparation of specification of the Charcon range of hard landscaping products, including model clauses, is available through the sales office. A free technical design service is also available.

For further information, please refer to our technical services on 01335 372222.

*Ratings based upon generic green guide values (2009) supplied by BRE Global Ltd, www.thegreenguide.co.uk

Charcon

Aggregate Industries, Hulland Ward,
Ashbourne, Derbyshire DE6 3ET

Tel: +44 (0) 1335 372 222

Fax: +44 (0) 1335 370 074

Email: landscaping@aggregate.com

Web: www.charcon.com